


Regular Type Hoist with Motor-Driven Trolley (HT)

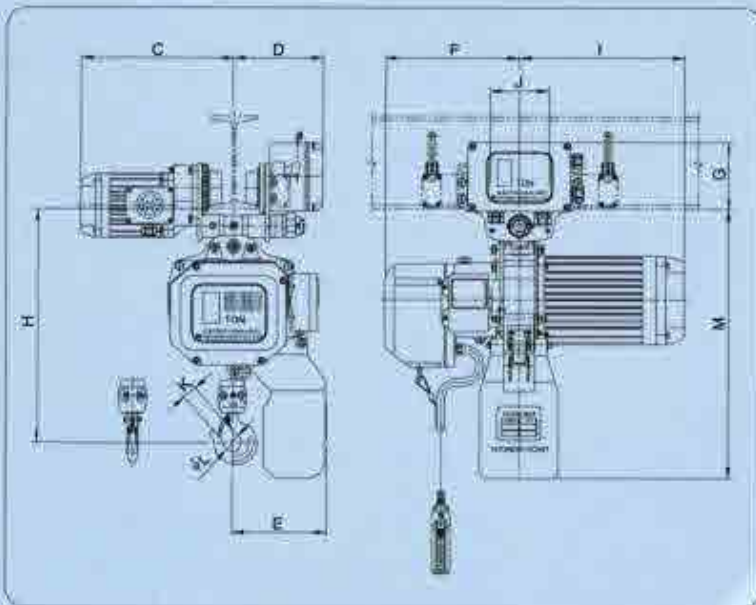

Specifications

| Capacity (kg) | Model | Lift (m) | Rating (min) | Hoisting Speed (mm) | | Hoisting Motor (kW) | Traversing Speed (mm) | | Traversing Motor (kW) | Load Chain (dia. x falls) | Net Weight (kg) | Beam Width (mm) | Min Radius for Curve (mm) |
|---------------|---------|----------|--------------|---------------------|-----------|---------------------|-----------------------|------|-----------------------|---------------------------|-----------------|-----------------|---------------------------|
| | | | | 50Hz | 60Hz | | 50Hz | 60Hz | | | | | |
| 1000 | HT-S100 | 4 | 30 | 5.4 | 6.5 | 1.5 | 16.6 | 20 | 0.25 | 7.1 x 1 | 93 | 75-125 | 1100 |
| 1000 | HT-D100 | | | 5.4/2.7 | 6.5/3.25 | 1.5/0.75 | • | • | | | 100 | | |
| 2000 | HT-S200 | 3 | | 2.7 | 3.25 | 1.5 | 8.3 | 10 | 0.13 | 7.1 x 2 | 103 | 100-150 | 1200 |
| 2000 | HT-D200 | | | 2.7/1.35 | 3.25/1.63 | 1.5/0.75 | • | • | | | 130 | | |

Dimensions (mm)

| Model | Sym. | C | D | E | F | G | H | I | J | K | L | M |
|---------|------|-------|-------|-----|-------|-----|-------|-------|-----|----|----|-------|
| HT-S100 | | 327.5 | 193.5 | 203 | 289.5 | 145 | 423 | 354.5 | 127 | 30 | 38 | 583.5 |
| HT-D100 | | 327.5 | 193.5 | 203 | 289.5 | 145 | 423 | 354.5 | 127 | 30 | 38 | 583.5 |
| HT-S200 | | 345.5 | 211.5 | 243 | 289.5 | 157 | 608.5 | 354.5 | 145 | 36 | 48 | 690 |
| HT-D200 | | 345.5 | 211.5 | 243 | 289.5 | 157 | 608.5 | 354.5 | 145 | 36 | 48 | 690 |

Note : 양경 4m 이상의 모델은 당사보 문의 바랍니다. In Case of lift height over 4mts, please contact us.
 상기 치수중 1000kg은 1-200x100x7, 2000kg은 1-250x125x7.5(기준임). The above dimension is as follows.
 1) Capacity 1000kg : 1-200x100x7, 2)2000kg : 1-250x125x7.5